



# Public Alert Beacon Installation Guide

## For Dotworkz D-Series Enclosures


### Dimensional Drawings

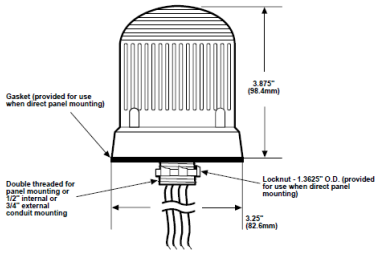


### # KT-STBB Low Voltage Beacon Kit

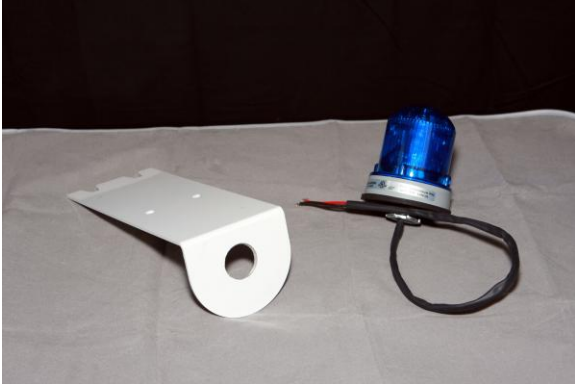


Kit Parts

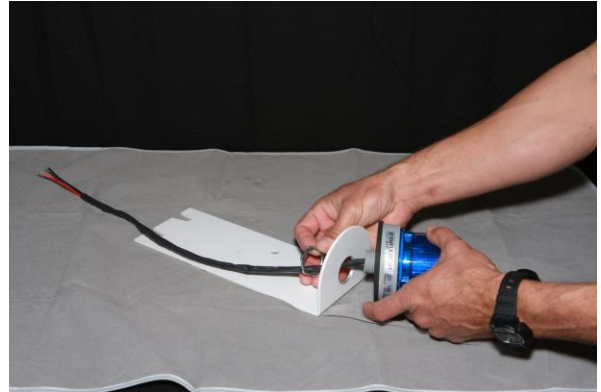

Remove Mounting Nut on bottom, Mount light as shown, re-install and tighten retainer nut

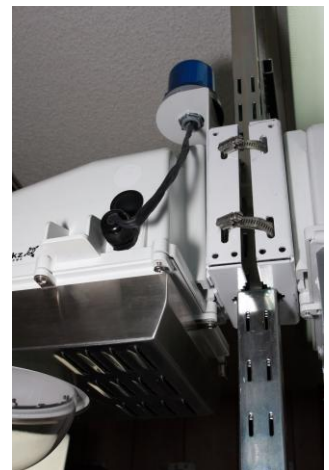

- 1) Install Lower Mount bolts to bracket or wall
- 2) Then slide keyhole slots of light bracket in place
- 3) Install Enclosure on mounts, including remaining top 2 enclosure mount bolts
- 4) Thread cable thru seal gland making a drip loop with excess wire
- 5) Tighten gland seal nut to seal wire.

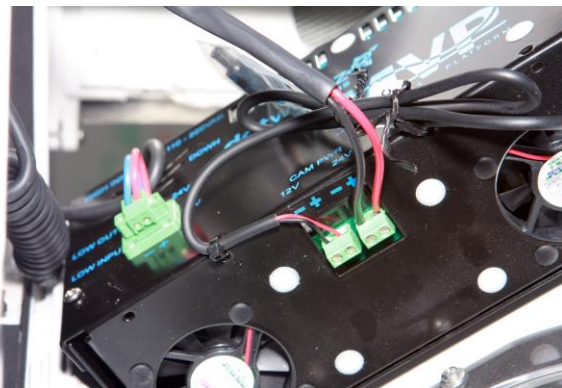

Install Low Voltage wires to appropriate power terminal, observe polarity and color codes



Installed light Kit Example